

AUTHENTICATION METHOD, AUTHENTICATION SYSTEM AND RECORDING MEDIUM

Publication number: WO0109735

Publication date: 2001-02-08

Inventor: UESHIMA YASUSHI (JP)

Applicant: COMSQUARE CO LTD (JP); UESHIMA YASUSHI (JP)

Classification:

- international: G09C1/00; G06F21/00; H04L9/32; H04L29/06; H04M3/38; H04M3/42; H04Q7/38; G09C1/00; G06F21/00; H04L9/32; H04L29/06; H04M3/38; H04M3/42; H04Q7/38; (IPC1-7): G06F15/00; H04B7/26; H04M3/42

- european: G06F21/00N5A2; G06F21/00N5A2C; G06F21/00N5A2T; H04L29/06C6C2; H04M3/38A; H04M3/42P2

Application number: WO2000JP04399 20000703

Priority number(s): JP19990216948 19990730

Also published as:



US6731731 (B1)

JP2001045562 (A)

Cited documents:



WO9627155

JP11120397

JP2000010927


EP0686905

JP10229459

Report a data error here

Abstract of WO0109735

For the authentication by a service provider, a registered user dials a registered telephone number to connect a CTI (computer telephony integration) server. The CTI server authenticates the user based on the dialed number, generates a password using a data processor, and transmits it to both of the user and the service provider. The service provider compares the password input by the user with the password received from the CTI server, and begins to supply services if the passwords coincide with each other.

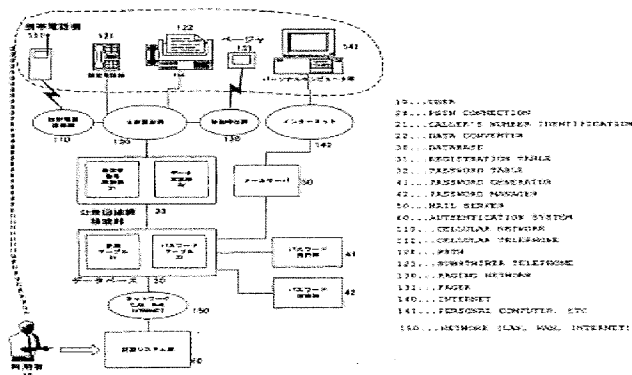

Data supplied from the esp@cenet database - Worldwide